

SGT 5213TL




52m - 1.300kg

5.000Kg

Características . Characteristics . Eigenschaften
Caractéristiques . Caratteristiche . Caratteristiche
Özellikler . ХАРАКТЕРИСТИКИ

	0 a 82 m/min 0 a 41 m/min	15 kW
	0 a 1 r.p.m.	2x5 daN.m
	0 a 60 m/min	3 kW
	15 m/min	2x3 kW
		30 kVA
		400 V +- 5% (50 Hz)

* Opção . Option . Optional . Option . Opción . Opzione . Seçenek . Опция

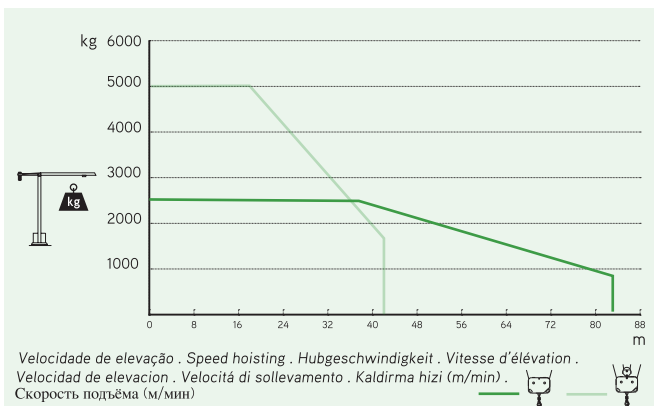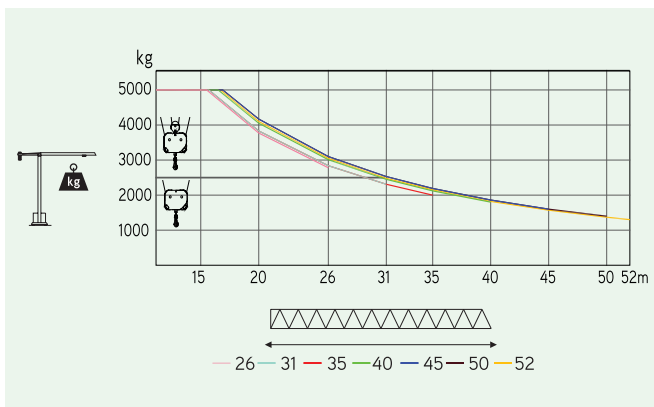

Velocidade de elevação . Speed hoisting . Hubgeschwindigkeit . Vitesse d'élévation .
Velocidad de elevación . Velocità di sollevamento . Kaldırma hızı (m/min) .
Скорость подъёма (м/мин)

Elementos . Parts . Teile . Éléments . Elementos . Elemento . Parçalar . ЭЛЕМЕНТЫ

		A (mm)	B (mm)	C (mm)	kg	Code
L55		11950	1210	2600	3100	509 52 13
L56		5200	1160	1930	590	
L52		5200	1160	1650	535	
L53		5200	1160	1650	510	
L42		11820	1160	1210	820	
L43a		2100	1160	1210	120	
L44		5100	1160	1210	230	
L45		8600	1160	1210	290	
RS6 RI5		2250	1350	2050	2640	
P1		1660	1220	1720	720	
CL5		12000	1380	560	2560	704 10 00
CP1		1160	165	3140	2x1000 2000	
CP2		1160	330	3140	5x2000 10000	704 20 00
				TOTAL	24125	
A5		11985	1160	1160	3080	530 12 00
A5		6075	1160	1160	1660	530 06 00
A5		3120	1160	1160	990	530 06 01
A5		3120	1385	1385	1040	530 06 03
A5		1275	1160	1160	450	530 06 02
A5		5530	500	750	1250	630 00 03
		2270	360	750	2x635 1270	
				TOTAL	2520	

SGT
5213TL