


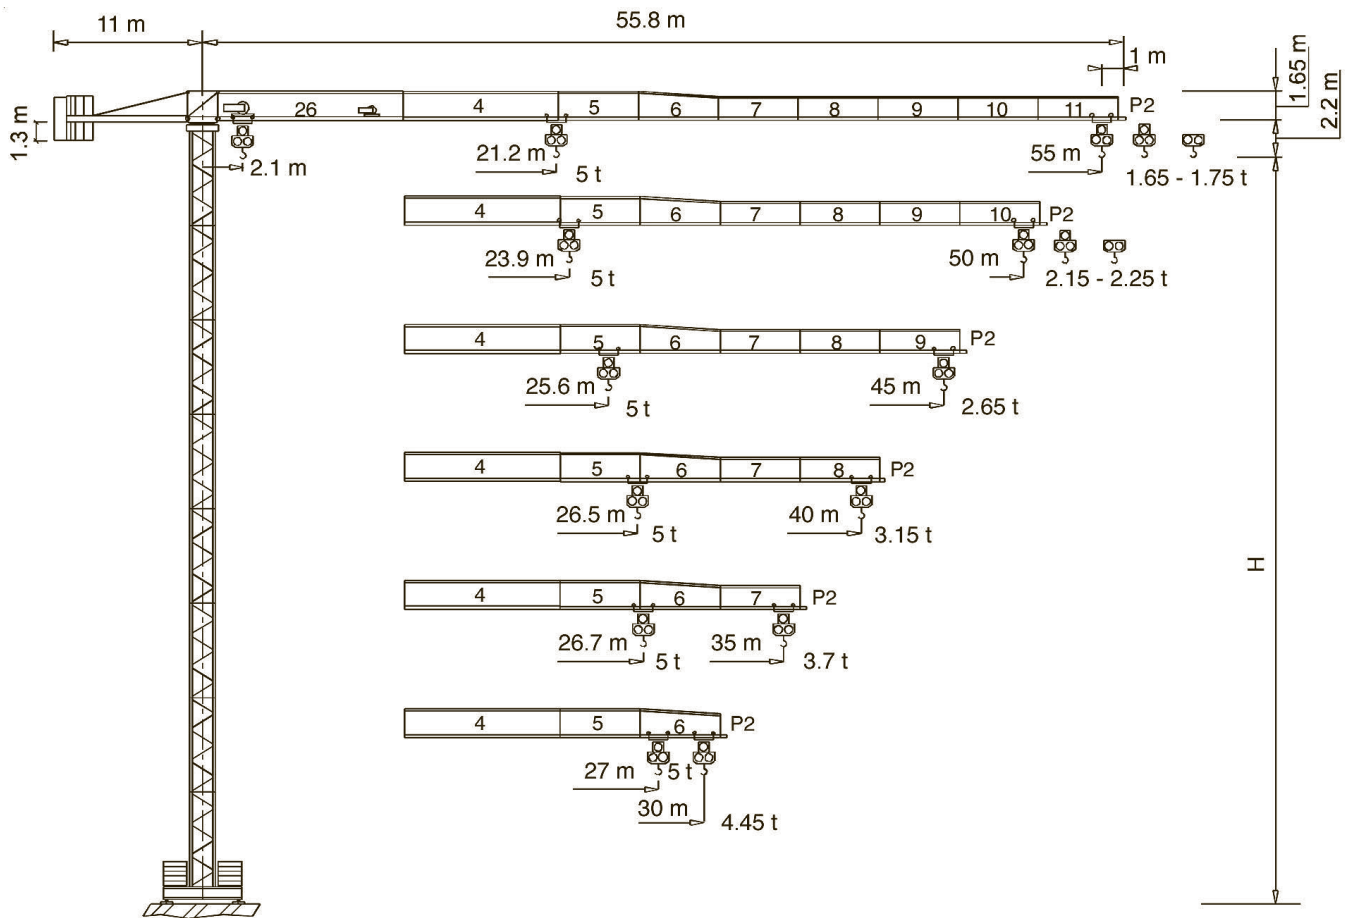

CE FEM 1.001 A3

Diagramma di portata
Load Diagram

I
GB

Courbes de charges
Lastkurven

F
D

Curvas de cargas

E

CTT 121 / A - 5																				
								m		5	10	15	20	25	30	35	40	45	50	55
2.5 t	†	-	40,45	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,21	1,96	1,75
2.5 t	†	-	39,04	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,43	2,11	1,86	1,65
5 t	†	-	21,20	m	†	5,00	5,00	5,00	5,00	5,00	4,16	3,39	2,84	2,43	2,11	1,86	1,65			
2.5 t	†	-	45,60	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,25		
2.5 t	†	-	44,03	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,44	2,15	
5 t	†	-	23,88	m	†	5,00	5,00	5,00	5,00	5,00	4,75	3,88	3,26	2,80	2,44	2,15				
2.5 t	†	-	45,00	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50		
5 t	†	-	25,64	m	†	5,00	5,00	5,00	5,00	5,00	5,00	4,20	3,53	3,04	2,65					
2.5 t	†	-	40,00	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50			
5 t	†	-	26,47	m	†	5,00	5,00	5,00	5,00	5,00	5,00	4,35	3,66	3,15						
2.5 t	†	-	35,00	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50				
5 t	†	-	26,70	m	†	5,00	5,00	5,00	5,00	5,00	5,00	4,40	3,70							
2.5 t	†	-	30,00	m	†	2,50	2,50	2,50	2,50	2,50	2,50	2,50	2,50							
5 t	†	-	27,00	m	†	5,00	5,00	5,00	5,00	5,00	5,00	4,45								

Altre installazioni
Other configurations


I
GB

Autres implantations
Aufstellmöglichkeiten

F
D

Otras implantaciones

E

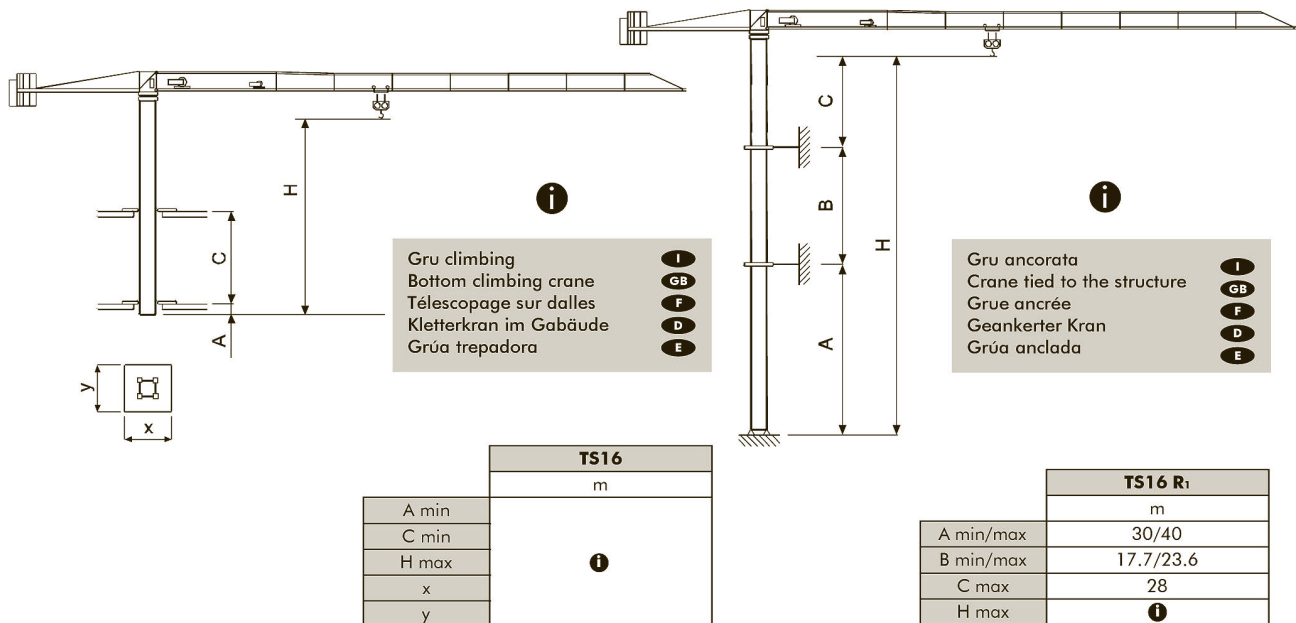







Consultateci Consult us Nous consulter Auf Anfrage Consultarnos

Torre I	Tower GB	Tour F	Turm D	Torre E
I Le prolunghe TS sono disponibili in lunghezze 11.8 m, 5.9 m, 2.95 m.	GB The available lengths for the TS tower sections are 11.8 m, 5.9 m, 2.95 m.	F Les éléments de mât TS sont disponibles en longueur 11.8 m, 5.9 m, 2.95 m.	D Die Turmschüsse TS sind mit Längen 11.8 m, 5.9 m, 2.95 m verfügbar.	E Los tramos de torre TS son disponibles en las medidas de largo 11.8 m, 5.9 m, 2.95 m.

TS16

i

- I** Sopraelevazione con gabbia di telescopaggio
- GB** Tower section for Top Climbing
- F** Surélévation avec cage télescopique
- D** Turm-Erhöhung mit Kletterwerk
- E** Sobreelevación con jaula

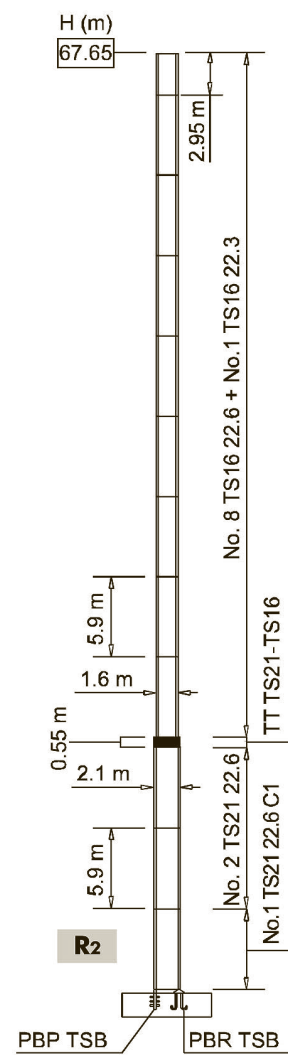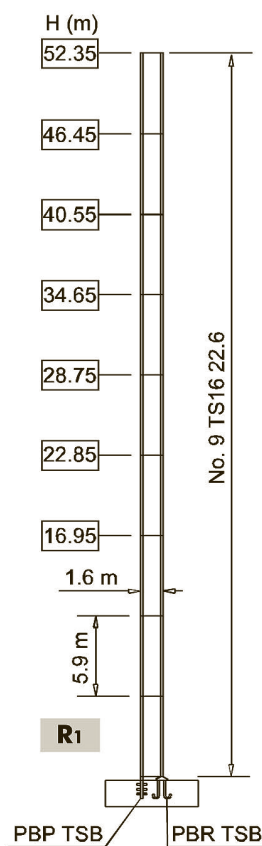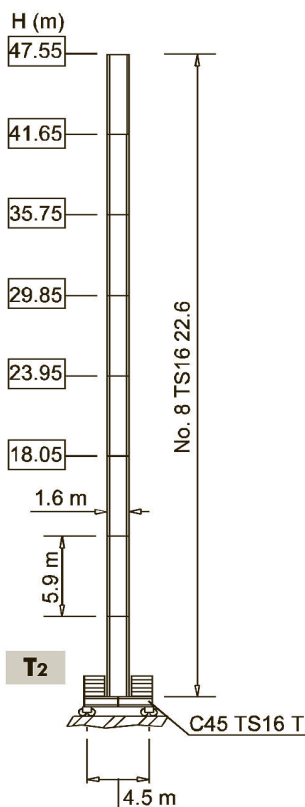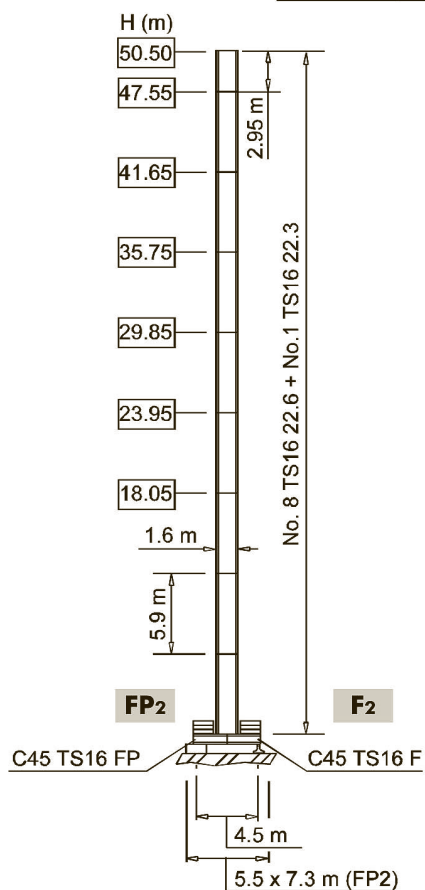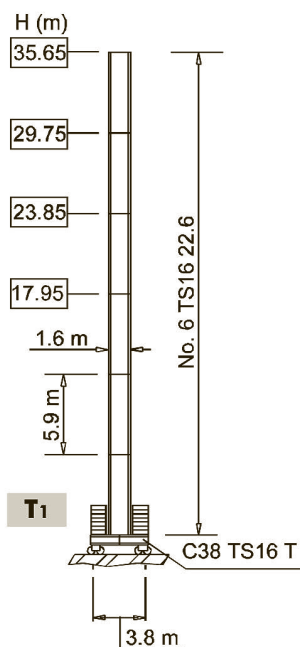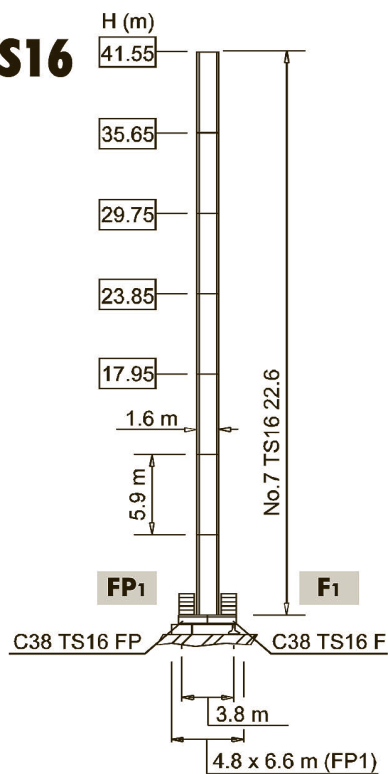

H Altezza massima sotto gancho	I Max. under hook height	GB Hauteur maxi. sous crochet	F Höchste Hackenhöhe	D Maxima altura bajo gancho	E
---------------------------------------	---------------------------------	--------------------------------------	-----------------------------	------------------------------------	----------

Meccanismi	I	Mécanismes	F	Mecanismos	E
Mechanisms	GB	Antriebe	D		

				
	15 AFC 25	41 * kVA	400 V - 50 Hz / 460 V - 60 Hz	2000/14/CE modificata
	18 AFC 25	42 * kVA		

* Gru senza traslazione / Crane without travelling equipment / Grue sans translation / Krane ohne Schienenfahren / Grúa sin traslación

			m/min	t	kW	
	15 AFC 25 (VARIANT)		0 ⇌ 1.7	2.5	15	186 m
			1.7 ⇌ 6	2.5		
			6 ⇌ 28	2.5		
			28 ⇌ 46	1.44		
			46 ⇌ 57	1.1		
			0 ⇌ 0.85	5		
			0.85 ⇌ 3	5		
			3 ⇌ 14	5		
			14 ⇌ 23	2.88		
			23 ⇌ 28.5	2.2		
	18 AFC 25 (VARIANT)		0 ⇌ 2.2	2.5	18	310 m
			2.2 ⇌ 8	2.5		
8 ⇌ 34			2.5			
34 ⇌ 55			1.46			
55 ⇌ 69			1.1			
		0 ⇌ 1.1	5			
		1.1 ⇌ 4	5			
		4 ⇌ 17	5			
		17 ⇌ 27.5	2.92			
		27.5 ⇌ 34.5	2.2			

	DVF 3 4 D5 (VARIANT)	0 ⇌ 6 ⇌ 30 ⇌ 60 m/min	4 kW
	SSR 1 1 80	0.84 r.p.m. (50 Hz) 1 r.p.m. (60 Hz)	1 × 80 Nm
	TAD 2RP 2M3	0 - 24 m/min (50 Hz)	2 × 3 kW
	TAD 2RG 4M3	0 - 29 m/min (60 Hz)	4 × 3 kW
			

		
	Max. H [m]	
T₁	29.75	> 29.75
T₂	35.75	> 35.75

	Sollevamento	I	Hoisting	GB	Levage	F	Heben	D	Elevación	E
	Traslazione carrello		Trolleying		Distribution		Katzfahren		Distribución	
	Rotazione		Slewing		Orientation		Schwenken		Orientación	
	Traslazione		Travelling		Translation		Schienenfahren		Traslación	
	Direttiva sul livello acustico		Directive on noise level		Directive sur le niveau acoustique		Richtlinie für den Schall-Leistungspegel		Directiva sobre el nivel acustico	
	Consultateci		Consult us		Nous consulter		Auf Anfrage		Consultarnos	
	Potenza totale richiesta		Power requirements		Puissance totale nécessaire		Geforderte Stromstärke		Potencia necesaria	
	Alimentazione		Power supply		Alimentation		Stromversorgung		Alimentación	



ARCOMET

Industrieweg 139 - 3583 Paal-Beringen - BELGIUM - T +32 (0)11 450 950 - EMAIL arcomet@arcomet.com - www.arcomet.com

 **TEREX** | COMEDIL